



جامعة ستاردوم

مجلة ستاردوم العلمية للدراسات الطبيعية والهندسية



— مجلة ستاردوم العلمية للدراسات الطبيعية والهندسية —
تصدر بشكل نصف سنوي عن جامعة ستاردوم
المجلد الثاني | العدد الأول - لعام 2024م
رقم الإيداع الدولي : ISSN 2980-3756





**Peer Reviewing Committee of Stardom Journal
for Natural and Engineering Sciences**

Head Of Committee

Prof. Taha Elwi – Iraq

Manager Of Committee

Prof. Abbas Al-Azzawi – Iraq

Language Editor

Mrs. Laila Hussein Al-Eyan – Turkey

Member of Committee

Prof. Ali Saegh – Iraq

Eng. Saeed Ahmed – Philistine

Prof. Hayder H. Al-Khaylani – Iraq

Dr. Salem Saleh Barahmah – Yemen

Prof. Ali Abdulmajeed Ali Ahmed – Yemen

Prof. Mohammed Moqbil – Yemen

**All literary and artistic property rights are reserved to
Stardom Journal for Engineering and Natural Sciences**

- ▶ **Unlocking the Cholesterol Content: A Comprehensive Analysis of Cholesterol Levels in Dairy Products, Fats, and Oils Through High-Performance Liquid Chromatography**
Mokhtar S. S. Al - Salimi-Fares S. S. Al-Saidi - Adel A. M. Saeed
- ▶ **Bilateral Generating Functions for the Two-Parameter, Three-variable Srivastava polynomials**
Dr. Salem Saleh Barahmah
- ▶ **A new extended beta function involving generalized mittag-leffler function and it's Applications**
Dr. Salem Saleh Barahmah
- ▶ **تربية و زراعة بعض أنواع النحل البري الملقح لطيف واسع من النباتات**
أ.د عبد السلام محمد - Prof:Abdoalsalam mohamed gaool Al-Hjry
- ▶ **مقال بحثي في كيمياء تحليل البيئة**
دراسة بعض الصفات الفيزيوكيميائية والملوثات غير العضوية للمياه العادمة الناتجة من مدبغة لودر للبيئة المجاورة
جمال أحمد عبدالله الذهلي - علي ناصر أحمد الكوم - عادل أحمد محمد سعيد
- ▶ **Flora Abyan governorate**
Abdul-Nasser Al-Gefrli
- ▶ **Investigation of the Absorbing the Crash Impact of Car Accedient Due Tube Inversion**
Eng. Abdulhakim Hamood Ahmed Abdulwahid-Dr. Fawaz Ahmed Ghaleb Noman-Eng. Nezar Nasser Ali Haithm
- ▶ **Investigation of the inside temperature to arrive comfortable condition1: case study Mechanical workshop building**
Dr. Fawaz Ahmed Ghaleb Noman
- ▶ **FIELD BALANCING FOR SINGLE BLADE FAN**
Eng. Saleel Saeed Abdo - Prof. Dr. Ahmed Saleh Alhunaishi

Stardom Journal of Natural and Engineering Sciences (SJNES)

Introduction

Aims and Scope:

The stardom Journal of Natural and Engineering sciences is a journal for the publication of peer reviewed, original research for all aspects of Natural Sciences and Engineering Sciences.

This journal provides a forum for the discussion of Natural and Engineering sciences problems around the world and for the presentation of results. It is aimed only at the Natural and Engineering sciences.

Research Areas Include, but are not exclusive to:

- Biology and biomedical engineering
- Environmental Sciences
- Chemistry studies and Chemical Engineering
- Physics studies
- Material Studies
- Mathematics
- Computer Sciences and engineering
- Civil Engineering
- Area Engineering
- Environmental Engineering
- Telecommunications Engineering and networking

- Computer Engineering
- Electrical Engineering
- Agriculture Engineering
- Human-machine systems
- Space exploration
- Renewable energy
- Power systems and control
- Artificial intelligence and its applications
- Theoretical studies

Papers submitted should address Stardom Natural and Engineering sciences issues using a range of techniques e.g. case studies, observational and theoretical analyses, the application of science, engineering and technology to questions of environmental concern or mathematical and computer modeling techniques with the aim of informing both the researcher and practitioner.

Before you Begin

Conflict of interest

All authors are requested to disclose any actual or potential conflict of interest including any financial, personal or other relationships with other people or organizations within three years of beginning the submitted work that could inappropriately influence, or be perceived to influence, their work.

Submission declaration and verification

Submission of an article implies that the work described has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder.

Changes to authorship

This policy concerns the addition, deletion, or rearrangement of author names in the authorship of accepted manuscripts:

Before the accepted manuscript is published in an online issue: Requests to add or remove an author, or to rearrange the author names, must be sent to the Journal Manager from the corresponding author of the accepted manuscript and must include: (a) the reason the name should be added or removed, or the author names rearranged and (b) written confirmation (e-mail, fax, letter) from all authors that they agree with the addition, removal or rearrangement. In the case of addition or removal of authors, this includes confirmation from the author being added or removed. Requests that are not sent by the corresponding author will be forwarded by the Journal Manager to the corresponding author, who must follow the procedure as described above. Note that: (1) Journal Managers will inform the Journal Editors of any such requests and (2) publication of the accepted manuscript in an online issue is suspended until authorship has been agreed.

After the accepted manuscript is published in an online issue: Any requests to add, delete, or rearrange author names in an article published in an online issue will follow the same policies as noted above and result in a corrigendum..

Role of the funding source

You are requested to identify who provided financial support for the conduct of the research and/or preparation of the article and to briefly describe the role of the sponsor(s), if any, in study design; in the collection, analysis and interpretation of data; in the writing of the report; and in the decision to submit the article for publication. If the funding source(s) had no such involvement then this should be stated.

Language

Please write your text in good English (American or British usage is accepted, but not a mixture of these). Authors who feel their English language manuscript may require editing to eliminate possible grammatical or spelling errors and to conform to correct scientific English may wish to use the English Language Editing, as well as Arabic Language is accepted.

Submission

Submission to this journal proceeds totally online and you will be guided stepwise through the creation and uploading of your files. The system automatically converts source files to a single PDF file of the article, which is used in the peer-review process. Please note that even though manuscript source files are converted to PDF files at submission for the review process, these source files are needed for further processing after acceptance.

Referees

Please submit, with the manuscript, the names and addresses of at least three potential referees.

Preparation

Use of word-processing software

It is important that the file be saved in the native format of the word processor used. The text should be in single-column format. Keep the layout of the text as simple as possible. Most formatting codes will be removed and replaced on processing the article. In particular, do not use the word processor's options to justify text or to hyphenate words. However, do use bold face, italics, subscripts, superscripts etc. When preparing tables, if you are using a table grid, use only one grid for each individual table and not a grid for each row. If no grid is used, use tabs, not spaces, to align columns. The electronic text should be prepared in a way very similar to that of conventional manuscripts.

Note that source files of figures, tables and text graphics will be required whether or not you embed your figures in the text.

To avoid unnecessary errors, you are strongly advised to use the 'spell-check' and 'grammar-check' functions of your word processor.

Please **do not** add line numbering to the text document.

Article structure

Subdivision - numbered sections

Divide your article into clearly defined and numbered sections. Subsections should be numbered 1.1 (then 1.1.1, 1.1.2, ...), 1.2, etc. (the abstract is not included in section numbering). Use this numbering also for internal cross-referencing: do not just refer to 'the text'. Any subsection may be given a brief heading. Each heading should appear on its own separate line.

Introduction

State the objectives of the work and provide an adequate background, avoiding a detailed literature survey or a summary of the results.

Material and methods

Provide sufficient detail to allow the work to be reproduced. Methods already published should be indicated by a reference: only relevant modifications should be described.

Results

Results should be clear and concise.

Discussion

This should explore the significance of the results of the work, not repeat them. A combined Results and Discussion section is often appropriate. Avoid extensive citations and discussion of published literature.

Conclusions

The main conclusions of the study must be presented in a short Conclusions section, which may stand alone or form a subsection of a Discussion or Results and Discussion section.

Essential title page information

- **Title.** Concise and informative. Titles are often used in information-retrieval systems. Avoid abbreviations and formulae where possible.
- **Author names and affiliations.** Where the family name may be ambiguous (e.g., a double name), please indicate this clearly. Present the authors' affiliation addresses (where the actual work was done) below the names. Indicate all affiliations with a lower-case superscript letter immediately after the author's name and in front of the appropriate address. Provide the full postal address of each affiliation, including the country name and, if available, the e-mail address of each author.
- **Corresponding author.** Clearly indicate who will handle correspondence at all stages of refereeing and publication, also post-publication. **Ensure that phone numbers (with country and area code) are provided in addition to the e-mail address and the complete postal address. Contact details must be kept up to date by the corresponding author.**
- **Present/permanent address.** If an author has moved since the work described in the article was done, or was visiting at the time, a 'Present address' (or 'Permanent address') may be indicated as a footnote to that author's name. The address at which the author actually did the work must be retained as the main, affiliation address. Superscript Arabic numerals are used for such footnotes.

Abstract

A concise and factual abstract is required. The abstract should state briefly the

purpose of the research, the principal results and major conclusions. An abstract is often presented separately from the article, so it must be able to stand alone. For this reason, References should be avoided, but if essential, then cite the author(s) and year(s). Also, non-standard or uncommon abbreviations should be avoided, but if essential they must be defined at their first mention in the abstract itself. Not more 250 words.

Graphical abstract

A Graphical abstract is optional and should summarize the contents of the article in a concise, pictorial form designed to capture the attention of a wide readership online. Authors must provide images that clearly represent the work described in the article. Graphical abstracts should be submitted as a separate file in the online submission system. Image size: Please provide an image with a minimum of 531×1328 pixels ($h \times w$) or proportionally more. The image should be readable at a size of 5×13 cm using

a regular screen resolution of 96 dpi. Preferred file types: TIFF, EPS, PDF or MS Office files.

Highlights

High lights are mandatory for this journal. They consist of a short collection of bullet points that convey the core findings of the article and should be submitted in a separate file in the online submission system. Please use 'Highlights' in the file name and include 3 to 5 bullet points (maximum 85 characters, including spaces, per bullet point).

Keywords

Immediately after the abstract, provide a maximum of 6 keywords, using American spelling and avoiding general and plural terms and multiple concepts (avoid, for example, 'and', 'of'). Be sparing with abbreviations: only abbreviations firmly established in the field may be eligible. These keywords will be used for indexing purposes.

Acknowledgements

Collate acknowledgements in a separate section at the end of the article before the references and do not, therefore, include them on the title page, as a footnote to the title or otherwise. List here those individuals who provided help during the research (e.g., providing language help, writing assistance or proof reading the article, etc.).

Math formulae

Present simple formulae in the line of normal text where possible and use the solidus (/) instead of a horizontal line for small fractional terms, e.g., X/Y . In principle, variables are to be presented in italics. Powers of e are often more conveniently

denoted by exp. Number consecutively any equations that have to be displayed separately from the text (if referred to explicitly in the text).

Footnotes

Footnotes should be used sparingly. Number them consecutively throughout the article, using superscript Arabic numbers. Many word processors build footnotes into the text, and this feature may be used. Should this not be the case, indicate the position of footnotes in the text and present the footnotes themselves separately at the end of the article. Do not include footnotes in the Referencelist.

Table footnotes

Indicate each footnote in a table with a superscript lowercase letter.

Artwork

Electronic artwork

General points

- Make sure you use uniform lettering and sizing of your original artwork.
- Save text in illustrations as 'graphics' or enclose the font.
- Only use the following fonts in your illustrations: Arial, Courier, Times, Symbol.
- Number the illustrations according to their sequence in the text.
- Use a logical naming convention for your artwork files.
- Provide captions to illustrations separately.
- Produce images near to the desired size of the printed version.
- Submit each figure as a separate file.

Formats

Regardless of the application used, when your electronic artwork is finalized, please 'save as' or convert the images to one of the following formats (note the resolution requirements for line drawings, halftones, and line/halftone combinations given below):

EPS: Vector drawings. Embed the font or save the text as 'graphics'.

TIFF: Color or grayscale photographs (halftones): always use a minimum of 300 dpi.

TIFF: Bitmapped line drawings: use a minimum of 1000 dpi.

TIFF: Combinations bitmapped line/half-tone (color or grayscale): a minimum of 500 dpi is required.

If your electronic artwork is created in a Microsoft Office application (Word, PowerPoint, Excel) then please supply 'as is'.

Please do not:

- Supply files that are optimized for screen use (e.g., GIF, BMP, PICT, WPG); the resolution is too low;
- Supply files that are too low in resolution;
- Submit graphics that are disproportionately large for the content.

Color artwork

Please make sure that artwork files are in an acceptable format (TIFF, EPS or MS Office files) and with the correct resolution. If, together with your accepted. Please note: Because of technical complications which can arise by converting color figures to 'gray scale' (for the printed version should you not opt for color in print) please submit in addition usable black and white versions of all the color illustrations.

Figure captions

Ensure that each illustration has a caption. Supply captions separately, not attached to the figure. A caption should comprise a brief title (**not** on the figure itself) and a description of the illustration. Keep text in the illustrations themselves to a minimum but explain all symbols and abbreviations used.

Tables

Number tables consecutively in accordance with their appearance in the text. Place footnotes to tables below the table body and indicate them with superscript lowercase letters. Avoid vertical rules. Be sparing in the use of tables and ensure that the data presented in tables do not duplicate results described elsewhere in the article.

References

Citation in text

Please ensure that every reference cited in the text is also present in the reference list (and vice versa). Any references cited in the abstract must be given in full. Unpublished results and personal communications are not recommended in the reference list, but may be mentioned in the text. If these references are included in the reference list they should follow the standard reference style of the journal and should include a substitution of the publication date with either 'Unpublished results' or 'Personal communication'. Citation of a reference as 'in press' implies that the item has been accepted for publication.

Web references

As a minimum, the full URL should be given and the date when the reference was last accessed. Any further information, if known (DOI, author names, dates,

reference to a source publication, etc.), should also be given. Web references can be listed separately (e.g., after the reference list) under a different heading if desired, or can be included in the reference list.

References in a special issue

Please ensure that the words 'this issue' are added to any references in the list (and any citations in the text) to other articles in the same Special Issue.

Reference style

Text: Indicate references by number(s) in square brackets in line with the text. The actual authors can be referred to, but the reference number(s) must always be given. Example: '..... as demonstrated [3,6]. Barnaby and Jones [8] obtained a different result'

List: Number the references (numbers in square brackets) in the list in the order in which they appear in the text.

Examples:

Reference to a journal publication:

[1] J. van der Geer, J.A.J. Hanraads, R.A. Lupton, The art of writing a scientific article, *J. Sci. Commun.* 163 (2010) 51–59.

Reference to a book:

[2] W. Strunk Jr., E.B. White, *The Elements of Style*, fourth ed., Longman, New York, 2000.

Reference to a chapter in an edited book:

[3] G.R. Mettam, L.B. Adams, How to prepare an electronic version of your article, in: B.S. Jones, R.Z. Smith (Eds.), *Introduction to the Electronic Age*, E-Publishing Inc., New York, 2009, pp. 281–304.

Submission checklist

The following list will be useful during the final checking of an article prior to sending it to the journal for review. Please consult this Guide for Authors for further details of any item.

Ensure that the following items are present:

One author has been designated as the corresponding author with contact details:

- E-mail address
- Full postal address
- Phone numbers

All necessary files have been uploaded, and contain:

- Keywords
- All figure captions
- All tables (including title, description, footnotes)

Further considerations

- Manuscript has been 'spell-checked' and 'grammar-checked'
- References are in the correct format for this journal
- All references mentioned in the Reference list are cited in the text, and vice versa
- Permission has been obtained for use of copyrighted material from other sources

INVESTIGATION OF ABSORBING THE CRASH IMPACT OF CAR ACCIDENT DUE TUBE INVERSION

Eng. Abdulhakim Hamood Ahmed Abdulwahid¹,

Dr. Fawaz Ahmed Ghaleb Noman^{1*}

Eng. Nezar Nasser Ali Haithm²

¹Department of Mechatronics and Industrial Engineering - Faculty of Engineering -
University of Aden – Yemen

²Department of Mechanical Engineering - Faculty of Engineering - University of
Aden - Yemen

Abstract

Achieving the safety factor is very important in all vehicles including the Cars. More than 1.3 million people die every year as a result of road traffic accidents, and between 20 to 50 million people suffer from non-fatal injuries, according to United Nations statistics. Minimizing the effect of the impact of car accident can prevent a serious injury or could possibly prevent a deadly accident. The main objective of this study is to reduce the effect of the impact when car accident occurs. In order to make this possible was a suitable design and manufacture a mechanical device performing the external inversion (curling) of circular tubes under dynamic axial-force. Effect of the designed mechanical device on the tube inversion forming process is studied through applying the system and fix it in front of the car in order to absorb the impact of the accident. The effect of used the aluminum and copper tubes in the absorbing the energy is studied through applying the load that is generated by Universal Testing Machine (UTM) and ABAQUS simulation methods. The results show that the 80 mm Copper tube with Die & Foam were satisfying because the amount of energy absorbed was much higher and twice comparing with the ordinary tubes. It is therefore recommended that the 80 mm Copper tube with Die & Foam is suitable design and can be considered as an efficient energy-dissipating device since it provides favorable crashworthiness characteristics and excellent energy absorption capacity for optimum safety while preserving enhanced manufacturability.

Keywords: Impact Testing, Die, Tubes, Dynamic Load, Energy Absorbed, Cracking.

التحقق من امتصاص تأثير الاصطدام لحوادث السيارات بواسطة انعكاس الأنابيب

إن تحقيق عامل الأمان مهم جدًا في جميع المركبات بما في ذلك السيارات. ويموت أكثر من 1.3 مليون شخص كل عام نتيجة لحوادث المرور على الطرق، ويعاني ما بين 20 إلى 50 مليون شخص من إصابات غير مميتة وفقاً لإحصاءات الأمم المتحدة. إن التقليل من تأثير حادث السيارة يمكن أن يمنع وقوع إصابة خطيرة أو ربما يمنع وقوع حادث مميت. الهدف الرئيسي من هذه الدراسة هو تقليل تأثير الاصطدام عند وقوع حادث سيارة. ولجعل ذلك ممكناً، تم تصميم وتصنيع جهاز ميكانيكي مناسب يقوم بالقلب الخارجي (الشباك) للأنابيب الدائرية تحت القوة المحورية الديناميكية. تمت دراسة تأثير الجهاز الميكانيكي المصمم على عملية تشكيل الأنبوب المعكوس من خلال تطبيق النظام وتثبيتته أمام السيارة لامتصاص تأثير الحادث. تمت دراسة تأثير استخدام أنابيب الألمنيوم والنحاس في امتصاص الطاقة من خلال تطبيق الحمل المتولد بواسطة آلة

الاختبار العالمية (UTM) وطرق محاكاة **ABAQUS**. أظهرت النتائج أن الأنبوب النحاسي مقاس 80 مم مع القلب والرغوة كان مرضياً لأن كمية الطاقة الممتصة كانت أعلى بكثير ومضاعفة مقارنة بالأنابيب العادية. ولذلك يوصى بأن يكون الأنبوب النحاسي مقاس 80 مم مع القلب والرغوة تصميمًا مناسبًا ويمكن اعتباره جهازًا فعالاً لتبديد الطاقة لأنه يوفر خصائص ملائمة لمقاومة التصادم وقدرة ممتازة على امتصاص الطاقة لتحقيق السلامة المثلى مع الحفاظ على قابلية التصنيع المحسنة.

الكلمات المفتاحية: اختبار التأثير، القلب، الأنابيب، الحمل الديناميكي، امتصاص الطاقة، التشقق

1.0 INTRODUCTION

Thin-walled tubes are widely used in aerospace factories, cars manufacturing, pipelines, etc. These cylindrical tubes are very beneficial in account of its tiny weight, high strength and easy building [1]. As example, tubes are characterized by geometrical effect, radius, thickness and length, and are mostly used as energy absorbents in deformation phenomenon such as buckling, expansion, cracking and inversion [2, 3]. Among the deformation phenomenon described, the expansion of the tube has certain important properties that make it a good absorbent. Studying the importance of the cylindrical tubes of such systems and the dynamic behavior of these structures is our great concern [4, 5]. Hence this study is aimed to Investigate the absorbing the crash impact of car accident due tube inversion by design and manufacture a mechanical device performing the external inversion (curling) of circular tubes under dynamic axial-force. In the present study, in order to recognize the effect of load on the tubes and how much energy is absorbed by the tubes that are located in a steel die the Universal Testing Machine (UTM) used to apply the axial force. UTM also used to test the compressive strength and tensile strength of materials. ABAQUS simulations program was employed to evaluate the effectiveness of the designed mechanical device on the tube inversion forming process is studied through applying the system and fix it in front the car in order to absorb the impact of the accident. Using ABAQUS software is one of the best modeling ways to get the data that we want. ABAQUS is a Finite Element Analysis (FEA) [6]. Due to improved computing capacity and the ability of FEA software packages to model extremely complicated components, structures and systems under

a wide range of circumstances and loading conditions, the use of FEA devices has become widespread. ABAQUS/CAE is used for model development (including load assignment, boundary conditions, etc.), analysis, job management, and visualization of the tests [7]. The ABAQUS/Regular tool is used in static and low-speed dynamics to provide reliable stress solutions. ABAQUS/Explicit is used for transient dynamics and is ideal for effects or events of short lasting [8]. The other key product available is ABAQUS/CFD, which is dedicated to fluid dynamics simulation and heat transfer and is suitable for thermal and fluid structural applications.

2.0 MATERIALS AND METHODS

2.1 Material Preparation

Material used in this study for the tube is Aluminum, copper, a prototype of tube as shown in **Figure (1a)**. Die is made of steel with different geometries and fillet radius with final shape of the die as shown in **Figure (1b)**. The tube was filling by foam to enhance the possibilities of inversion to occur. The reason why is because foam is working as supportive agent and help in avoiding buckling.

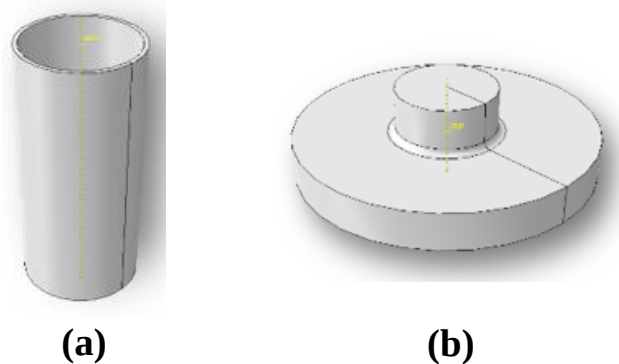


Figure 1: (a) Cylindrical Tube, and (b) Die

2.2 Testing Procedure

In the present study, the Universal testing machine (UTM) and Charpy impact machine are the best machines that can be used to apply the axial force and get the amount of energy absorb by the specimen easily and also UTM machine gives possibility to apply the force at different speed. The universal testing machine (UTM) is used to test the compressive strength and tensile strength of materials. UTM has the ability to do all the tests required in this study such as compression, bending, and it performs tension test. The good thing about this machine is the presence of load cells and extensometers that measure the required parameters such

as force and deformation. In addition, it is connected to a computer and also used to simulations by ABAQUS program and can be collected data easily as shown in **Figure (2)**.



Figure 2: universal testing machine (UTM).

2.3 Mechanical Property Test

In this study the evaluation of examining the best dimension and characteristics of the tube and the die by Experimental setup and Modeling ABAQUS program. So, ABAQUS contain three important tasks, starting with drawing the parts, and then add the material to the program, and assign the characteristics that we want, such as the density, young modules of and Poisson's ratio, etc. to the part. And simulates the modeling and visualizes the deformation on the material, also, it shows the results that are required. Using this program will give us a good result of our inversion tests, on Aluminum tube and other material that could be used later such as Copper. And be able to know how much energy that the material can absorb and notice the deformation.

2.4 Software Testing and Validation

2.4.1 First simulation trail

Material that is used in this trail is Aluminum. The reason of choosing aluminum because it can deform easily and gives a good result to see either the buckling or the inversion that occurs. The mechanical properties of aluminum tube that used on the ABAQUS program are shown in **Table (1) and Table (2)**.

Table 1: Mechanical properties of Aluminum

Properties	Value
------------	-------

density (ton/mm ³)	2.71e-9 ton/mm ³
young modulus (n/mm ²)	71700
poisson ratio	0.33
Yield strength (MPa)	185
Ultimate strength (MPa)	214

Table 2: Mechanical properties of Aluminum were used in ABAQUS

Yield Stress	Plastic Strain
350	0
368.71	0.001
376.5	0.002
391.98	0.005
403.15	0.008
412.36	0.011
422.87	0.015
444.17	0.025
461.5	0.035

507.9	0.07
581.5	0.15
649.17	0.25
704.22	0.35
728.78	0.4
751.85	0.45
773.68	0.5
794.44	0.55
814.28	0.6

Many parameters have been chosen, to ensure that the external inversion occurs are shown in **Figure (3)**. **Figure (3)** shows the thickness (t) of the tube, r_i , r_o are the inner and outer radius, respectively. R is the radius of the fillet, and H is the height of inner fillet, instead of using foam, we raise the length of the die, to avoid buckling. And l which is the length of the tube. The dimensions that we used in this experiment for the tube and the die, are given by $l_d = 25\text{mm}$, $R = 3\text{mm}$, $R_d = 19.5\text{mm}$, $\Theta = 43\text{mm}$, $t = 1.5\text{mm}$, $l = 97\text{mm}$, $\alpha = 75$ degree.

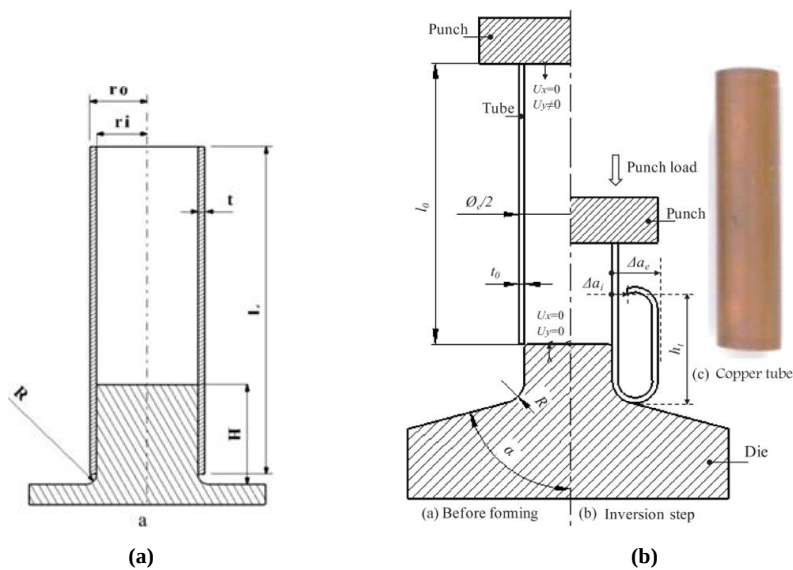


Figure 3: Details of the specimen design with (a) a rigid die, external inversion, and (b) a rigid die, external inversion.

Figure (4) shows the, Tube, Die and Upper Plate used for Design the mechanical device on the tube inversion forming process is studied through applying the system and fix it in front the car in order to absorb the impact of the accident. **Figure (5)** shows the, assembly of all parts that contact with Aluminum tube, starting from the tube, and also the die that works as the base of the tube, and designed it to be rigid so it will not deform when the load is pushing the aluminum tube downward, and finally the plate, which weighs two tons, so that can crash the tube and make it deform.

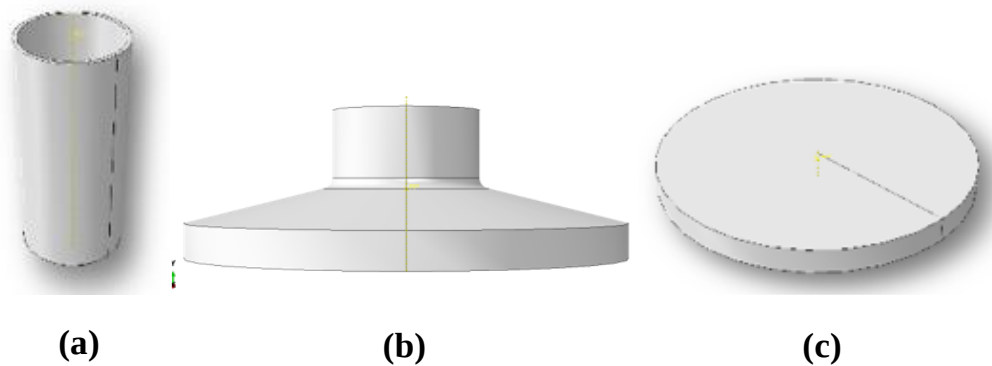


Figure 4: (a) Tube, (b) Die and (c) Upper Plate.

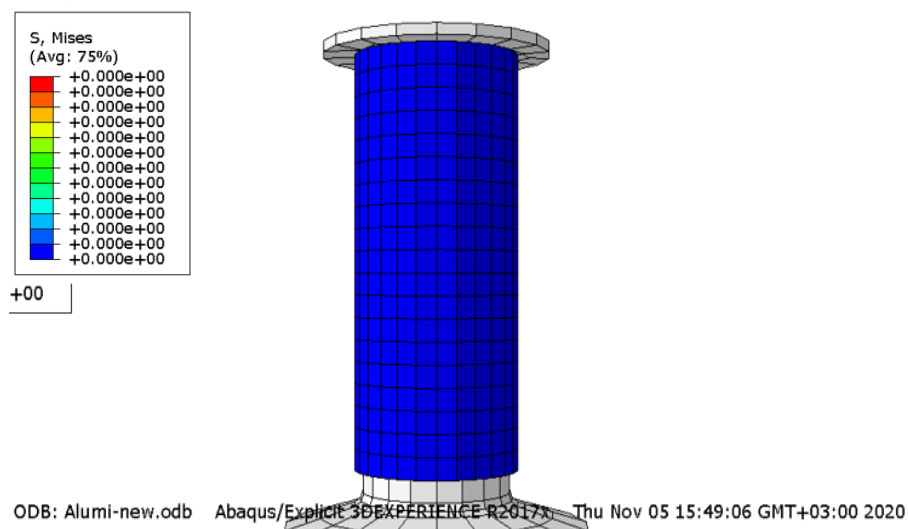


Figure 5: assembly of all parts that contact with Aluminum tube

2.4.2 Second simulation trail:

Material that is used in Second simulation trail is Copper. The reason of choosing Copper because it can deform without needing of big force and give kind of a good result to see either the buckling or the inversion occurs. The mechanical properties of Copper tube that used on the ABAQUS program are shown in

Table (3) and Table (4).

Table 3: Mechanical properties of Copper

Properties	value
density (ton/mm ³)	8.96e-9 ton/mm ³
young modulus (n/mm ²)	117000
Poisson ratio	0.34
Yield strength (MPa)	33.3
Ultimate strength (MPa)	210

Table 4: Mechanical properties of Copper were used in ABAQUS

yield stress	plastic strain
297.37 30	0.0000
343.23 20	0.0012
366.1620	0.0022
390.5250	0.0040
400.5570	0.0060
406.2900	0.0088
410.5890	0.0140
413.4550	0.0213
414.1720	0.0254
414.8890	0.0282

Figure (6) shows the, assembly of all parts that contact with Copper tube, starting from the tube, and also the die that works as the base of the tube, and designed it to be rigid so it will not deform when the load is pushing the aluminum tube downward, and finally the plate, which weighs two tons, so that can crash the tube and make it deform. The dimensions that we used in this experiment for the tube and the die, are given by $l_d = 25\text{mm}$, $R = 2\text{mm}$, $R_d = 10\text{mm}$, $\Theta = 22\text{mm}$, $t = 0.5\text{mm}$, $l = 70\text{mm}$, $\alpha = 60$ degree.




Figure 6: Assembly of all parts that contact Copper tube

2.5 Experimental Setup

In experimental part, the copper tube only chooses with different length and cases as shown in **Figure (7)** and **Figure (8)**. In copper experiment, the load vs Displacement were indicated at Time = 120s and $\alpha = 75^\circ$, with length = 70 mm & 80 mm, after that use Ls-Prepost software to get area under Load vs Displacement curve witch it will be the amount of energy absorption as shown in **Table (5)**.

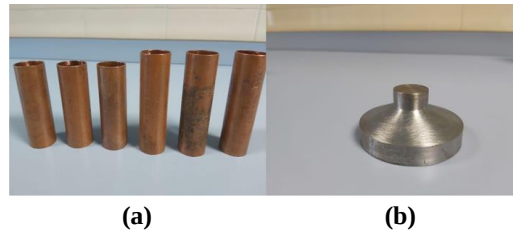


Figure 7: (a) Copper tube samples, and (b) Steel die.




(a) First Trail



(b) Second Trail



(c) Third Trail



(d) Forth Trail



(e) Fifth Trail



(f) Sixth Trail

Figure 8: Copper tubes samples for different experimental trail

Table 5: The descriptions of the experimental trail

Experiment al Trail	Length Copper Tube (mm)	of Description
First	70	without Die
Second	70	with Die
Third	70	with Die & Lubricant
Fourth	80	with Die & Lubricant
Fifth	80	with Die & Lubricant & Foam
Sixth	80	with Die & Foam

3.0 RESULTS AND DISCUSSION

3.1 Results and Discussion of ABAQUS Simulation

First it should be known that ABAQUS is a very sensitive tool, so if there is such a small error, the process will fail, and the tube will buckle, and inversion will not accrue. Unfortunately, the experiment not succeeded as planned, even though we used and define new parameters for the die. The buckling accrues and the fully inversion didn't appear as expected. But despite this we are very satisfied with the result, especially the inversion accrues in the first few seconds. So, after drawing the parts, we assigned aluminum material to the tube, and then we gave the upper plate ((which is a discrete rigid)), with inertia that is as 2 tons' weight, and moving towards the tube with speed of 1 m/s. also, we defined a friction coefficient between the surfaces as 0.2, with step time period as 0.05. This force is generated from the upper plate and going downward will make the tube to be crushed. And in his way, we can observe the reaction that occurs either inversion or buckling. To avoid the die from deforming we made it as discrete rigid, and, we have fixed it, so it will not move in any direction.

3.1.1 Results and Discussion of ABAQUS for First simulation trail

The dimensions that we used in this experiment for the tube and the die, are given by $l_d = 25\text{mm}$, $R = 3\text{mm}$, $R_d = 19.5\text{mm}$, $\Theta = 43\text{mm}$, $t = 1.5\text{mm}$, $l = 97\text{mm}$, $\alpha = 75$ degree. **Figure (9)** shows the upper plate moves only in Y direction downward, and crash the tube and succeed with the curling of the aluminum tube but while the process continued the buckling occurred. The relationship between the force and

the time is given by **Figure (10)**. Finally, we have used "LS-PrePost", to calculate the amount of energy absorbed by the Aluminum tube, **Figure (11)** shows that program, and the energy absorbed was 982 joules.

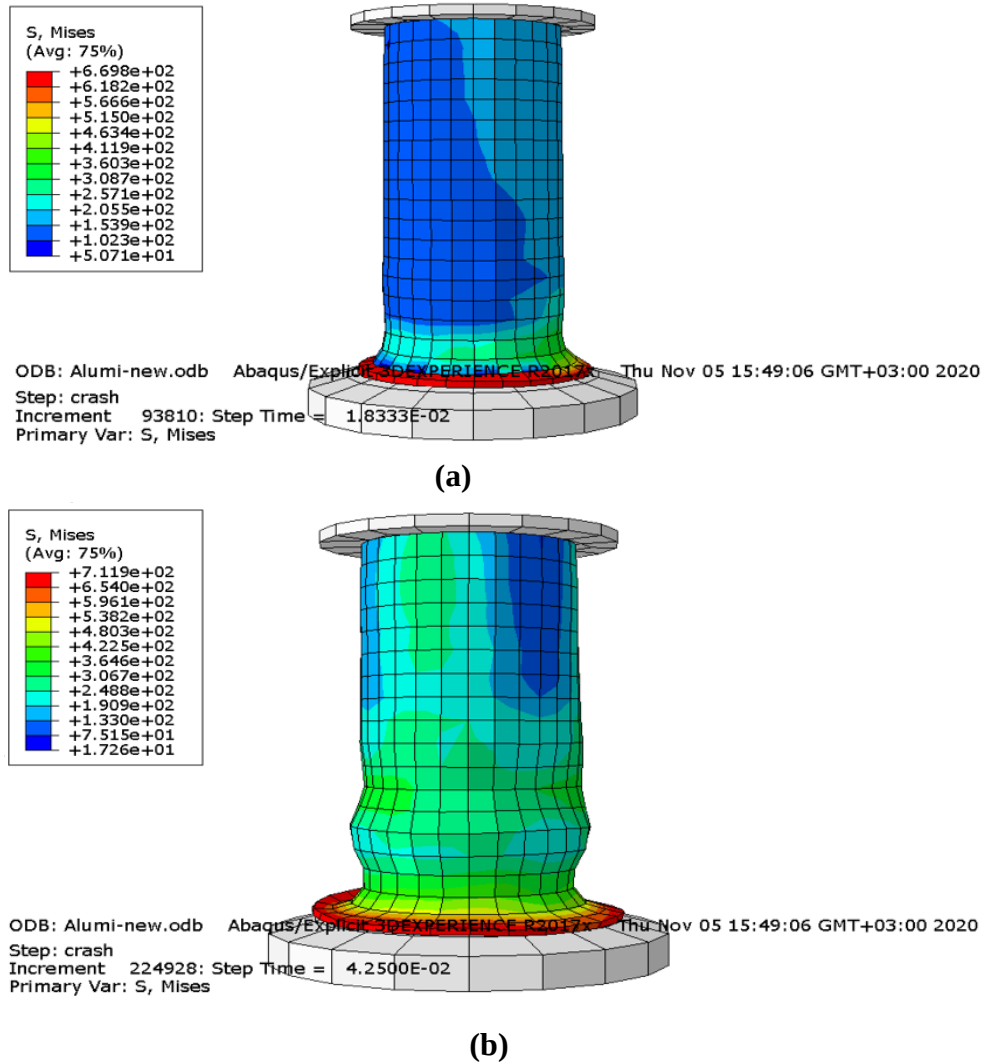


Figure 9: Modeling deformation of first trail

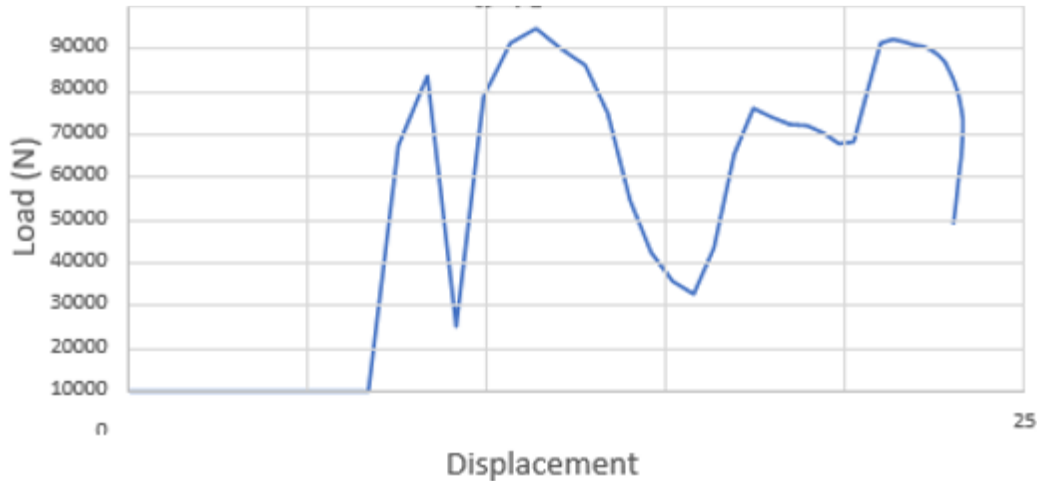


Figure 10: Force VS Displacement for 97mm Aluminum tube with Die & $\alpha=75^\circ$

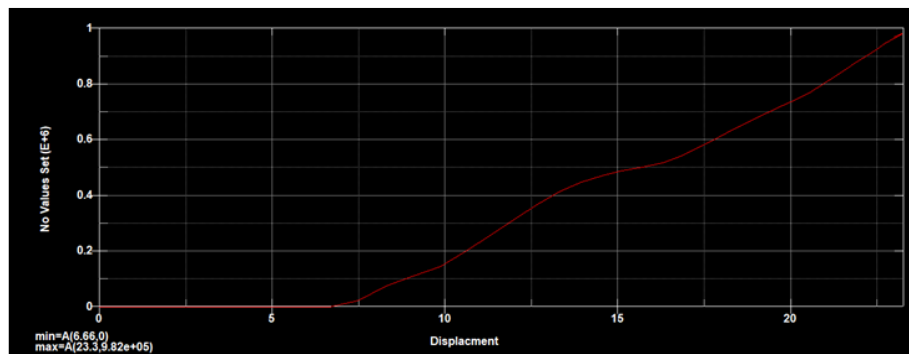


Figure11: Energy absorbed for Aluminum first trail

3.1.2 Results and Discussion of ABAQUS for Second simulation trail

The dimensions that are used in this experiment for the tube and the die, are given by $l_d = 25$ mm, $R = 2$ mm, $R_d = 10$ mm, $\Theta = 22$ mm, $t = 0.5$ mm, $l = 70$ mm, $\alpha = 60$ degree. The amount of inertia that is used is 2 tons weight and moving towards the tube with coefficient of friction between the surfaces as 0.2, with step time period as 0.05s. This force that is generated from the upper plate and going downward will make the tube to be crushed. From the results, it has been observed that, the reaction that occurs either inversion or buckling. As you can see from the **Figures (12)** the upper plate moves only in Y direction, and crash the tube and succeed with the curling of the Copper tube but while the process continued the buckling occurred. The relationship between the force and the time is given by **Figure (13)**. Finally, we have used "LS-PrePost", to calculate the amount of energy absorbed by the Copper tube, **Figures (14)** shows that program, and the energy absorbed was 615 joules.

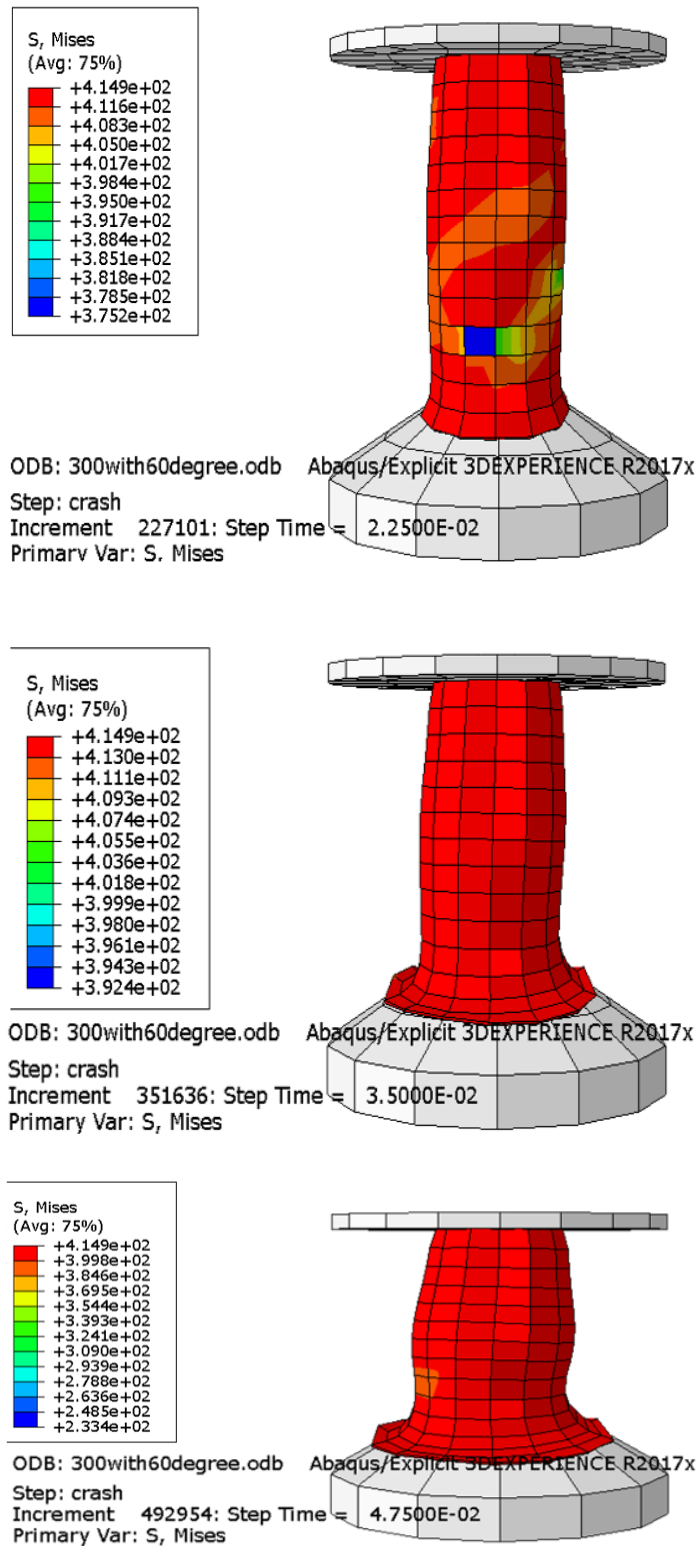


Figure 12: Modeling deformation of Second rail

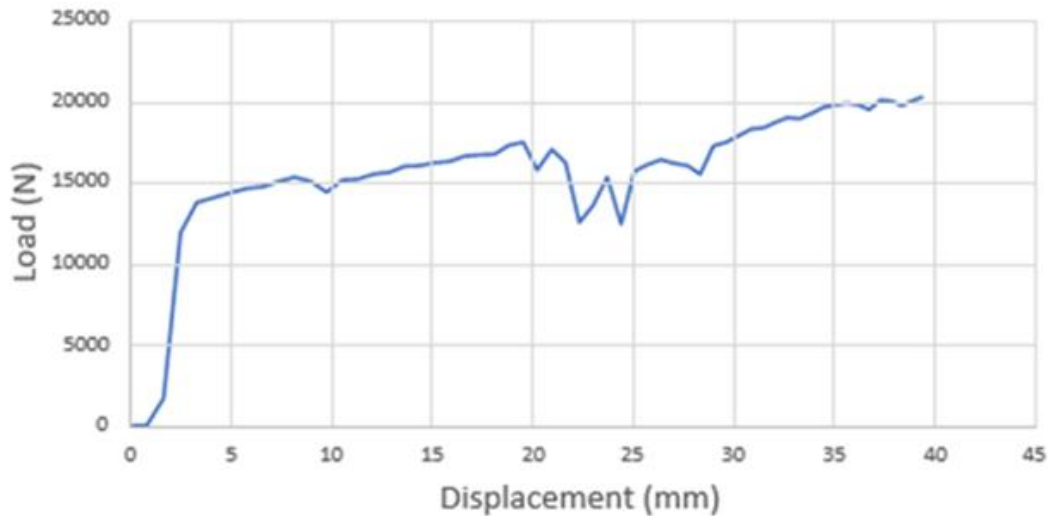


Figure 13: Force VS Displacement for 70mm Copper tube with Die & $\alpha=60^\circ$

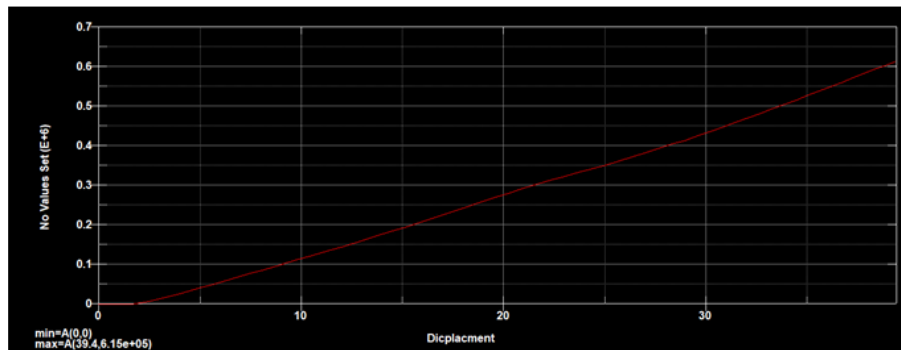


Figure 14: Energy absorbed for second trail for copper

3.2 Experimental Result

Figure (15) and Figure (16) show a comparison between the different experimental result trail. It can be observed that for all the experimental result trail, the first experiment for copper, we take load vs Displacement at Time=120s and $\alpha = 75^\circ$ after that we use Ls-Prepost software to get area under Load Vs Displacement curve witch it will be the amount of energy absorption. The length of copper tube is 70 mm, without Die. Amount of energy absorbed in the first trail was = 72.3 J. For second trail using copper we did the experiment, and we take load vs Displacement at Time=120s and $\alpha = 75^\circ$, after that we use Ls-prepost software to get area under Load Vs Displacement curve witch it will be the amount of energy absorption. The length of copper tube is 70mm, with Die. Amount of energy absorbed in the second trail was = 167 J. For third trail using copper we did the experiment, and we take load vs Displacement at Time=120s and $\alpha = 75^\circ$, after that we use Ls-prepost software to get area under Load Vs Displacement curve witch it will be the amount

of energy absorption. The length of copper tube is 70mm, with Die & Lubricant. Amount of energy absorbed in the third trail was = 136 J. For forth trail using copper we did the experiment, and we take load vs Displacement at Time=120s and $\alpha = 75^\circ$ after that we use Ls-Prepost software to get area under Load Vs Displacement curve witch it will be the amount of energy absorption. The length of copper tube is 80 mm, with Die & Lubricant. Amount of energy absorbed in the fourth trail was = 67.2 J. For fifth trail using copper we did the experiment, and we take load vs Displacement at Time=120 s and $\alpha = 75^\circ$, after that we use Ls-Prepost software to get area under Load Vs Displacement curve witch it will be the amount of energy absorption. The length of copper tube is 80mm, with Die & Lubricant & Foam. Amount of energy absorbed in the fifth trail was = 149 J. For sixth trail using copper we did the experiment, and we take load vs Displacement at Time=120s and $\alpha = 75^\circ$, after that we use Ls-prepost software to get area under Load Vs Displacement curve witch it will be the amount of energy absorption. The length of copper tube is 80mm, with Die & Foam. Amount of energy absorbed in the sixth trail was = 158 J.

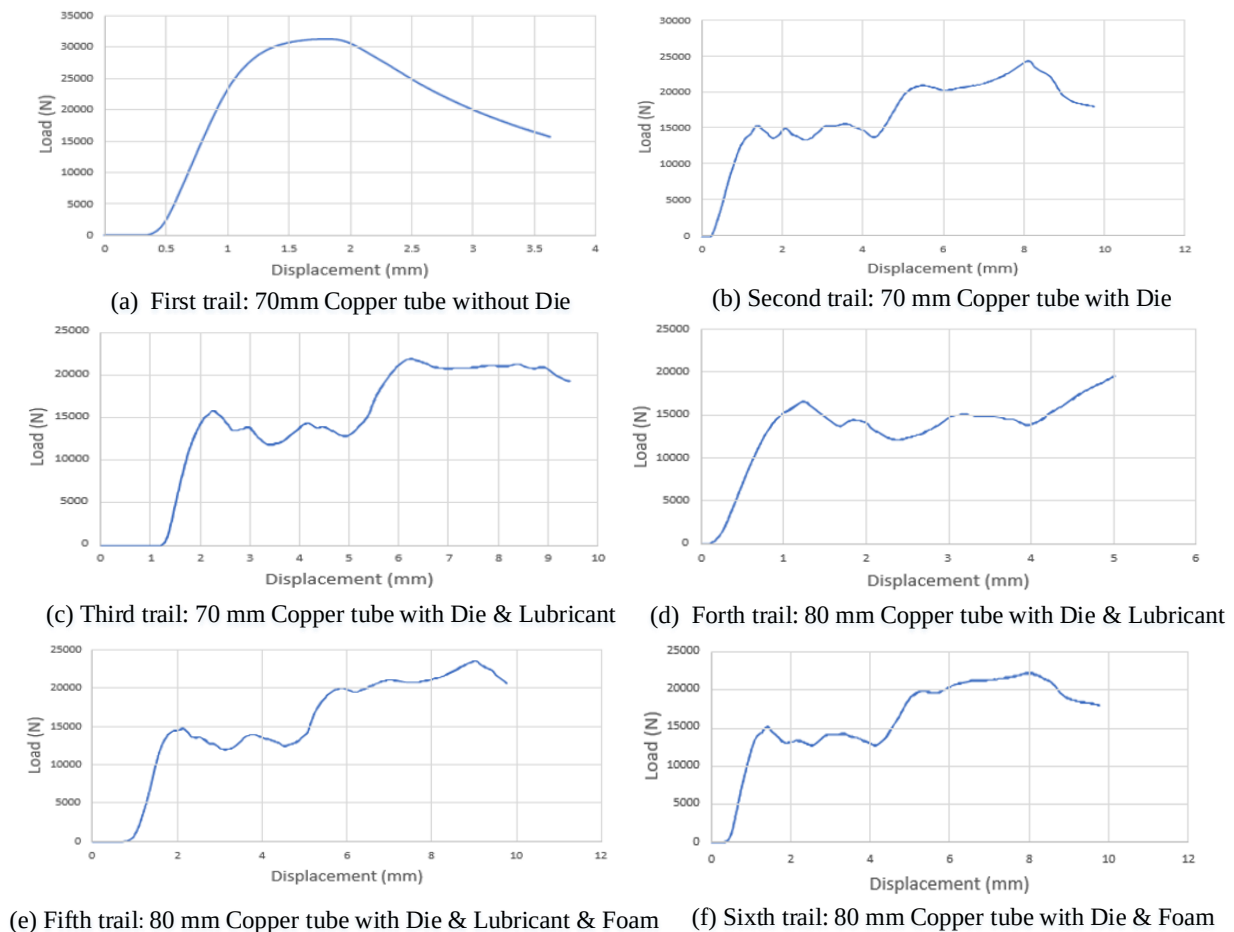
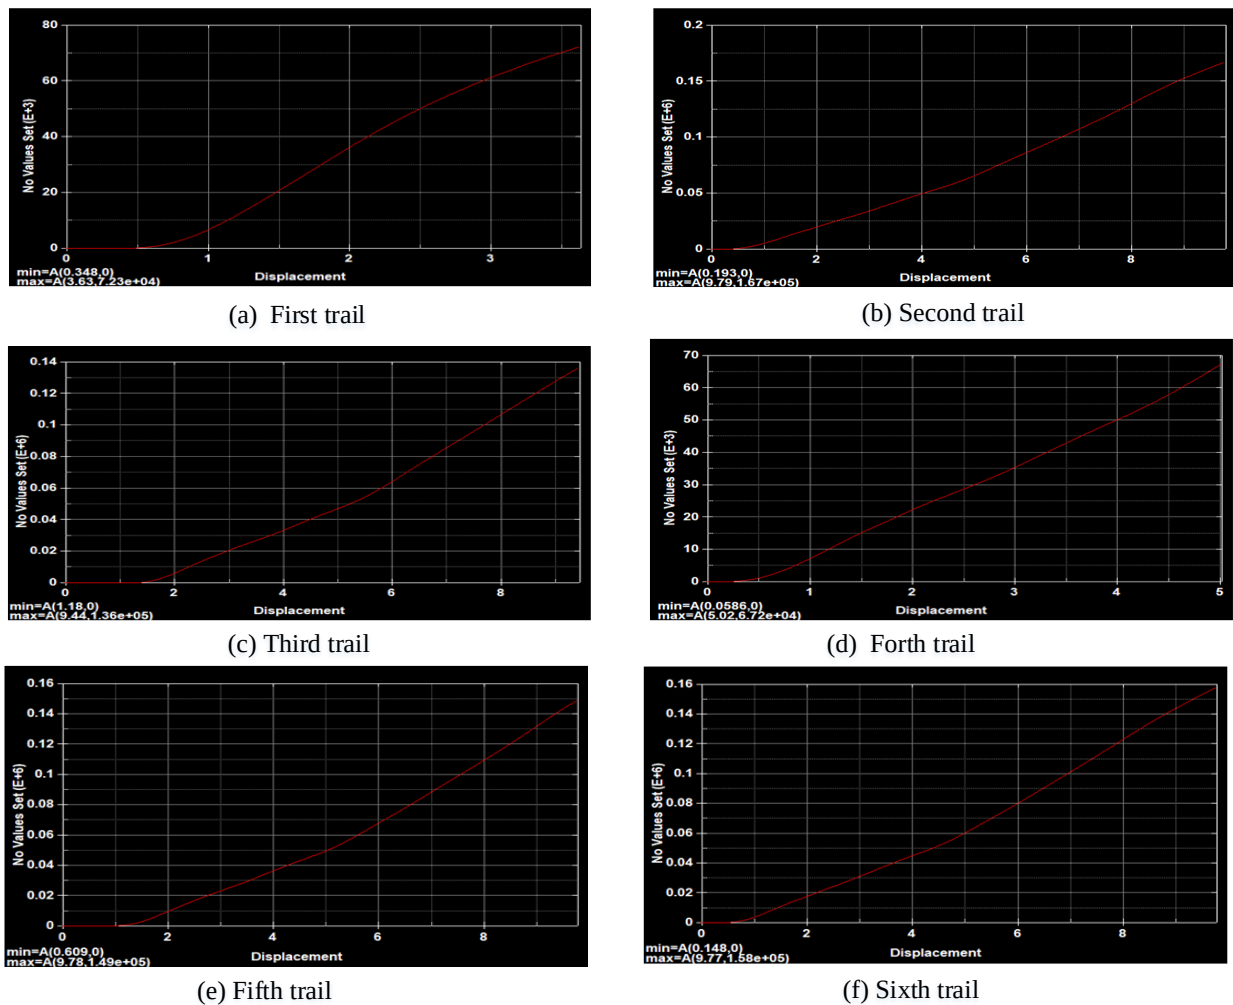


Figure 15: Energy absorbed for different trails for copper

**Figure 16:**

Energy absorbed for different trail for copper

3.3 Comparison of results of Experimental trails and Simulations

The method executed to assess the investigation of absorbing the crash impact of car accident due tube inversion was by compare the result of experimental and simulation of the different trails are shown in **Figure (17)** and **Table (6)**. From the results, it has been observed that, 80 mm Copper tube with Die & Foam is good material for absorbing the crash impact of car accident. The amount of energy absorbed for 80 mm Copper tube with Die & Foam is higher about 158 J. The results show that the amount of energy absorbed for 80 mm Copper tube with Die & Foam recorded the higher comparing with the another trails.

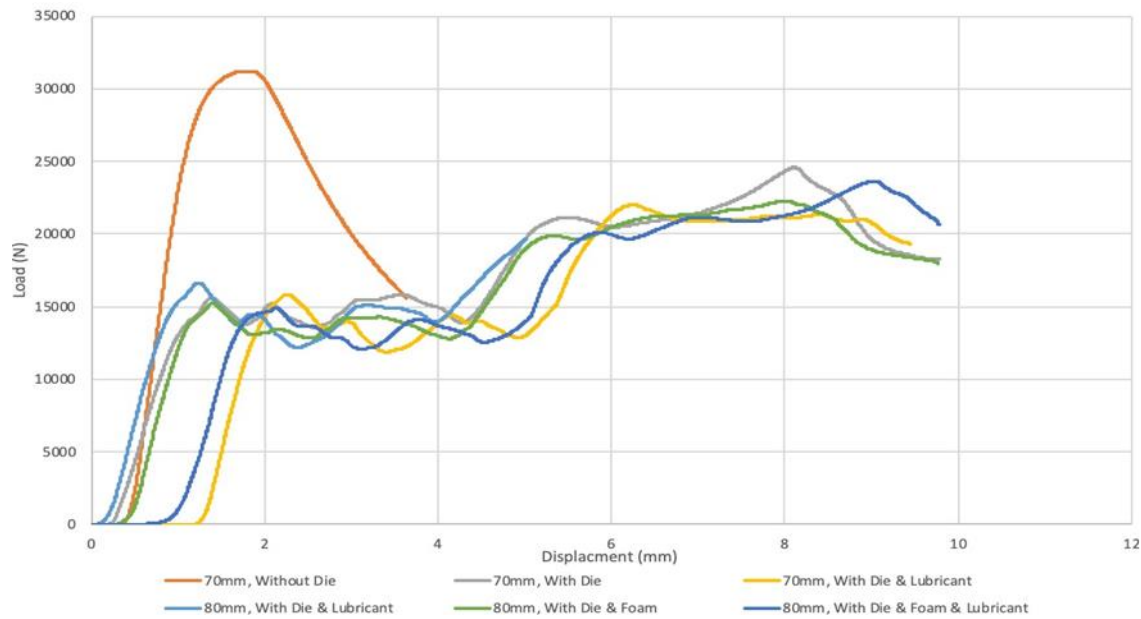


Figure 17: Comparison between load vs displacement of copper with different length & situations

Table 6: Comparison of the amount of energy absorbed and Energy density of different trails

ABAQUS		
Test mood	Amount of energy absorbed (J)	Energy density (MJ/m ³)
97 mm Aluminum tube with Die & $\alpha = 75^\circ$	98 2	153.45130 5
70 mm Copper tube with Die& $\alpha = 60^\circ$	61 5	133.17046 26
Experimental		

70 mm Copper tube without Die	72 .3	15.655649 5
70 mm Copper tube with Die	16 7	36.161735 37
70 mm Copper tube with Die & Lubricant	13 6	29.449077 91
80 mm Copper tube with Die & Lubricant	67 .2	12.732395 45
80 mm Copper tube with Die & Lubricant & Foam	14 9	28.231055 38
80 mm Copper tube with Die & Foam	15 8	29.936286 91

4.0 CONCLUSION

This study has presented the results of an experimental and simulation of different trails that aimed to assess the design and manufacture a mechanical device performing the external inversion (curling) of circular tubes under dynamic axial-force. The effect of the designed mechanical device on the tube inversion forming process is studied through applying the system and fix it in front the car in order to absorb the impact of the accident. The die has a fillet radius of 3 mm and high of 25 mm, the radius of the die is $R_d = 19.5$ mm, $\alpha = 75$ degree. In experimental part the copper tube only chooses with different length and cases. The copper material has been given a good result in the previous researches. The length of the samples that used in the experiments was 70 mm and 80 mm with thickness of 1 mm. In simulation part the aluminum material as added beside copper material because not able to provide aluminum material in the experimental part. The dimension that used in simulation part are much similar to the experimental part. From the results, it has been observed that, the 80 mm Copper tube with Die & Foam has excellent energy absorption ability compared to the ordinary tube. The amount of energy absorbed for 80 mm Copper tube with Die & Foam recorded the higher comparing with the another trails about 158 J. Therefore, the 80 mm Copper tube with Die & Foam can be considered as an efficient energy-dissipating device since it provides favorable crashworthiness characteristics, while preserving enhanced manufacturability.

Acknowledgement

The authors would like to acknowledge the support from the Faculty of Engineering, University of Aden. The authors also are grateful to the staff of the Mechatronics and Industrial Engineering Department for facilitate the permission to use the Materials Science Laboratory for conducting the experimental for this study.

REFERENCES

1. Olabi, A., et al., Optimised design of nested circular tube energy absorbers under lateral impact loading. *International Journal of Mechanical Sciences*, 2008. **50**(1): p. 104-116.
2. Salehghaffari, S., M. Tajdari, and F. Mokhtarnezhad, The collapse of thick-walled metal tubes with wide external grooves as controllable energy-dissipating devices. *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*, 2009. **223**(11): p. 2465-2480.
3. Liu, J., et al. Study of crash energy absorption characteristics of inversion tube on passenger vehicle. in *IOP Conference Series: Materials Science and Engineering*. 2017. IOP Publishing.
4. Meon, M.S. and H. Husain, Investigation of the Amount of Energy Absorption of Aluminium Tube: Inversion and Concertina Collapse Mode. *Advanced science engineering information technology*, 2012. **2**(3): p. 69-73.
5. Li, Y. and Z. You, External inversion of thin-walled corrugated tubes. *International Journal of Mechanical Sciences*, 2018. **144**: p. 54-66.
6. Barbero, E.J., *Finite element analysis of composite materials using Abaqus®*. 2023: CRC press.
7. Arnold, S.M., et al., *Micromechanics-Based Structural Analysis (FEAMAQ) and Multiscale Visualization Within Abaqus/CAE Environment*. 2010.
8. Burlayenko, V.N. and T. Sadowski, Transient dynamic response of debonded sandwich plates predicted with finite element analysis. *Meccanica*, 2014. **49**: p. 2617-2633.



STARDOM UNIVERSITY

**Stardom Scientific Journal of
Natural and Engineering Sciences**



— **STARDOM SCIENTIFIC JOURNAL OF NATURAL AND ENGINEERING SCIENCES** —
PUBLISHED TWICE A YEAR BY STARDOM UNIVERSITY
Volume 2 - 1st issue 2024
International deposit number : ISSN 2980-3756